

Deployment

To deploy the Portainer container, you'll need to first set up a couple of configurations. These configurations will create a persistent volume, expose ports, and enable the container to run at start up automatically.

Create Persistent Volume

In your docker engine CLI, run the following command:

- ```
docker volume create portainer_data
```

- Volume name is `portainer_data`


## Run the Container

Run the container as you would any other container, with the following ports exposed: 8000 (Portainer Agent), 9000(Web GUI)

- ```
docker run -d -p 8000:8000 -p 9000:9000 --name=portainer --restart=always  
/var/run/docker.sock:/var/run/docker.sock -v portainer_data:/data  
portainer/portainer-ce
```

- **-d** to run in background
- **-p** to expose ports
- **--name** to name container
- **--restart** to make it run constantly
- **/var/run/docker.sock:/var/run/docker.sock** to enable portainer to manage the docker registry of the local machine
- **-v** declares a volume to use
- **portainer/portainer-ce** refers to the community edition version of the container

You're all set! Run through the set-up wizard via the web GUI that can be accessed at your docker engine IP port 9000 and create your admin account. You can now view the following dashboard:

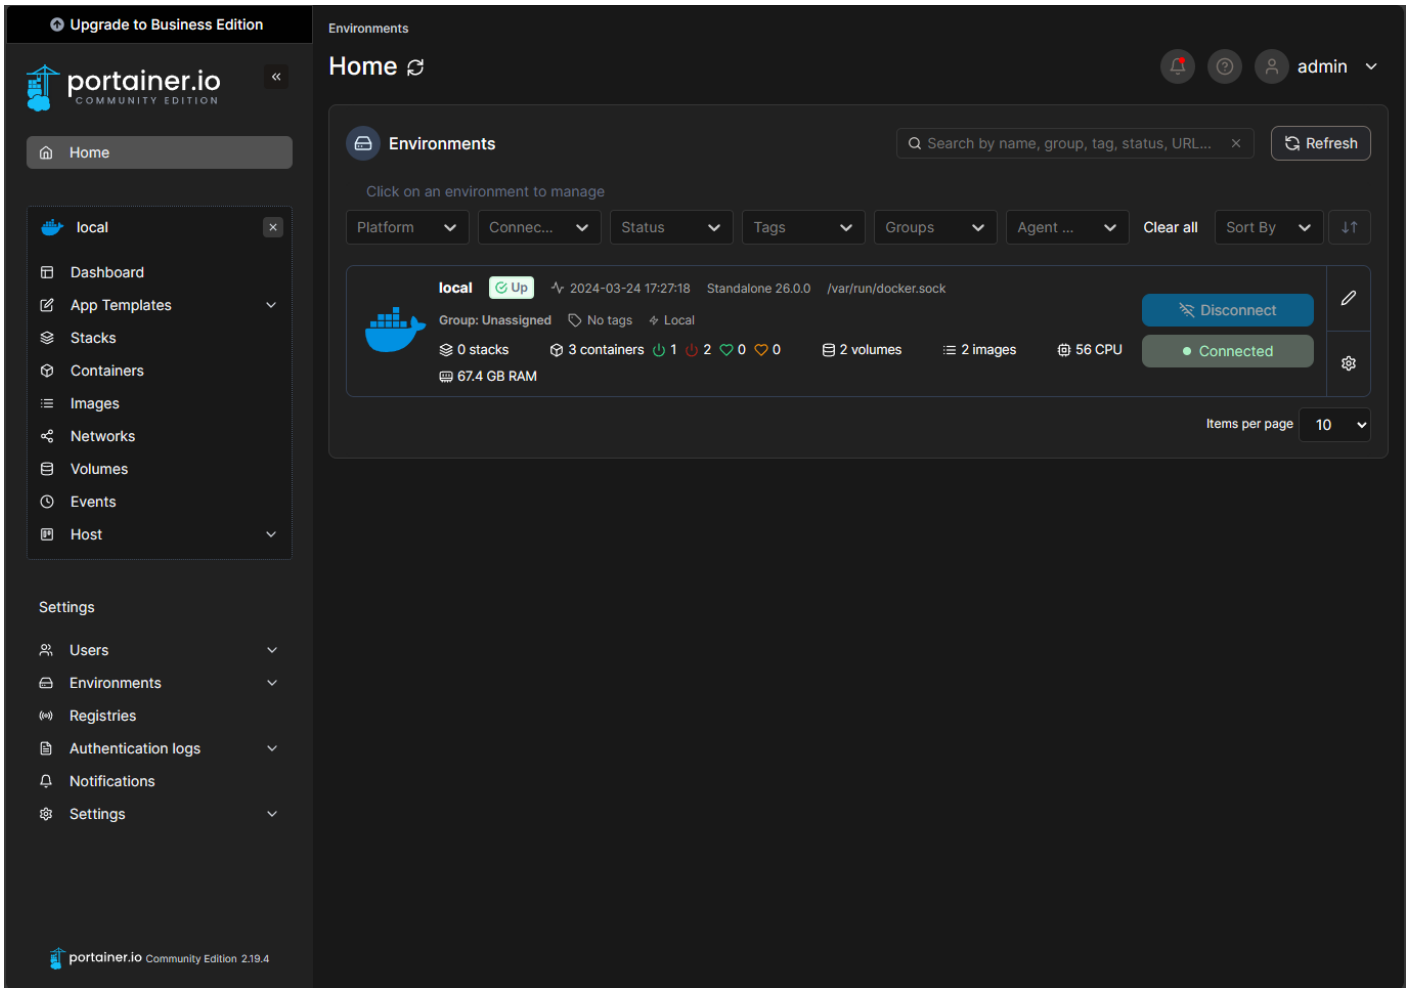

Revision #2

Created 2024-03-24 22:17:11 UTC by Austin

Updated 2024-04-06 06:23:21 UTC by Austin